



Fixed optic



Adjustable optic



Wall Washer optic



φ 105mm



φ 105mm



φ 75mm



φ 75mm



φ 75mm



φ 75mm



φ 75mm




φ 75mm



75x75mm



φ 75mm



φ 75mm



75x75mm



φ 75mm



φ 75mm



75x75mm





φ 75mm





75x75mm



φ 75mm

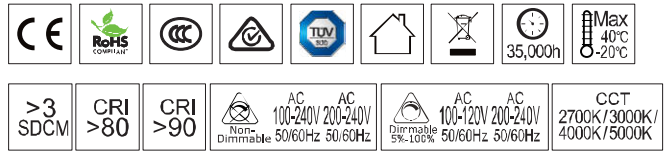


Surface Color: White Black

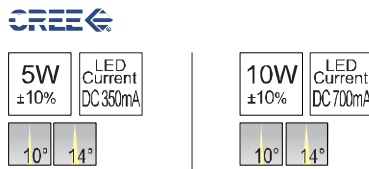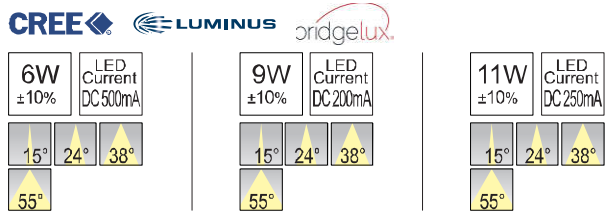




Reflector color



Titanium Golden Bright silver




Reflector color




Titanium Golden Bright silver

Accessories



Honeycomb-040 Beam stop-040

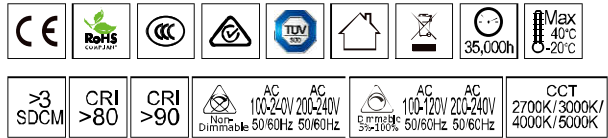


Surface Color: | White ■ Black



12W ±10%	LED Current DC 300mA	15W ±10%	LED Current DC 350mA
15°	24°	38°	
55°			


>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz	AC 200-240V 50/60Hz	CCT 2700K/3000K/ 4000K/5000K
------------	------------	------------	------------------------	------------------------	------------------------	------------------------	------------------------------------

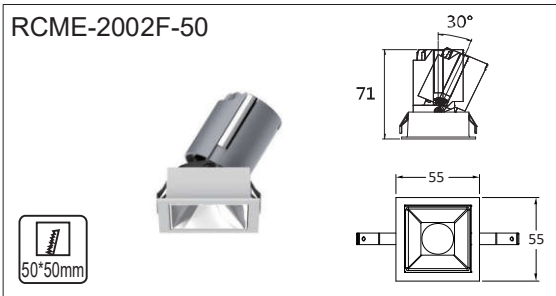

Reflector color



Accessories



>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz Non-Dimmable	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz Dimmable 5%-100%	AC 200-240V 50/60Hz	CCT 2700K/3000K/4000K/5000K
---------	---------	---------	-------------------------------------	---------------------	---	---------------------	-----------------------------


Surface Color: White Black




3W ±10%	LED Current DC 500mA	5W ±10%	LED Current DC 200mA
15° 24° 38°		15° 24° 38°	
55°		55°	



Reflector color

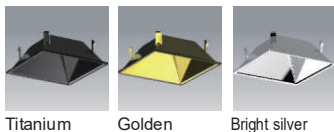

Accessories





8 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz Non-Dimmable	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz Dimmable 5%-100%	AC 200-240V 50/60Hz	CCT 2700K/3000K/4000K/5000K
--------	---------	---------	-------------------------------------	---------------------	---	---------------------	-----------------------------



Surface Color: White Black




8W ±10%	LED Current DC 700mA	13W ±10%	LED Current DC 350mA
8° 12° 24°		18° 24° 38°	
36°		55°	

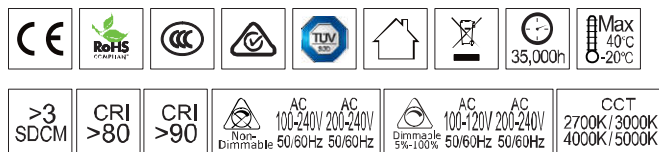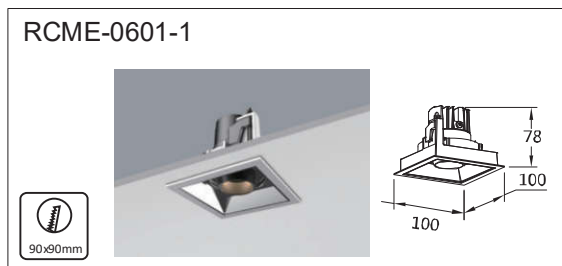

Surface Color: White Black

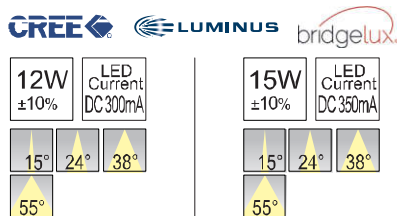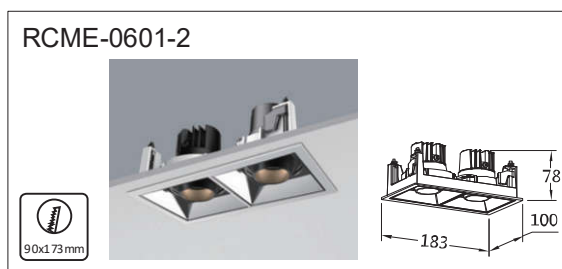


Reflector color

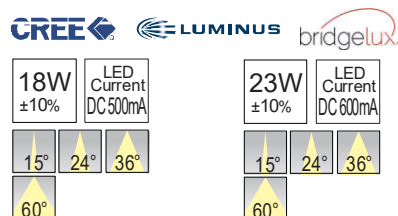


Reflector color




Accessories




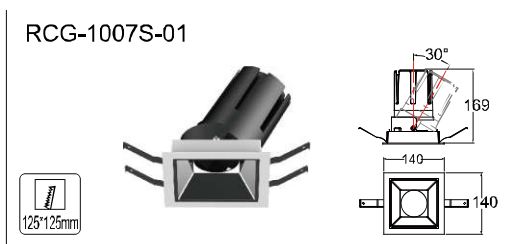


Reflector color



Titanium Golden Bright silver



Titanium Golden Bright silver



Titanium Golden Bright silver



>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	AC 100-120V 5%±100%	AC 200-240V 50/60Hz	CCT 2700K/3000K/4000K/5000K
---------	---------	---------	---------------------	---------------------	---------------------	---------------------	-----------------------------

Surface Color: White ■ Black





28W ±10%	LED Current DC 700mA	33W ±10%	LED Current DC 800mA		
15°	24°	38°	15°	24°	38°
55°			55°		



Accessories



Honeycomb-Ø40 Beam soft lens-Ø40

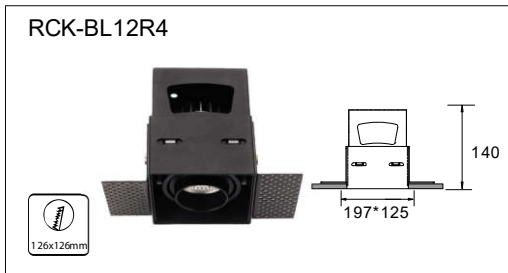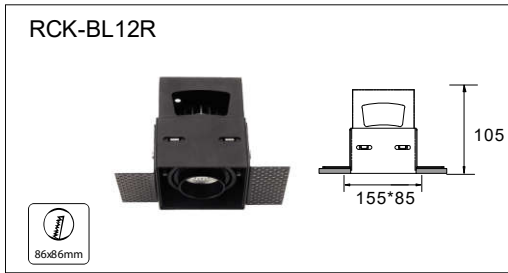

Woven PC

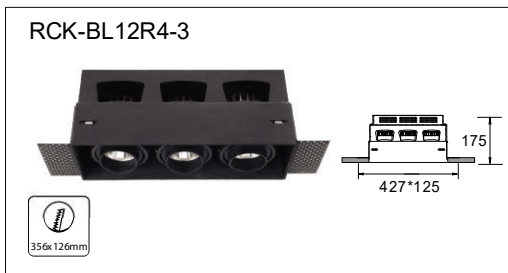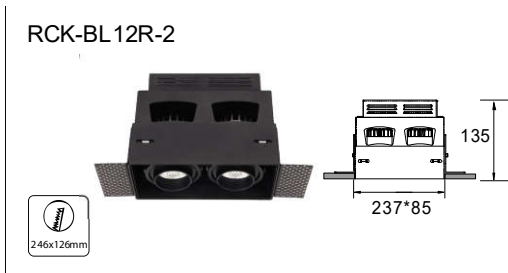

>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz Non-dimmable	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz Dimmable	AC 200-240V 50/60Hz	CCT 2700K/3000K/4000K/5000K
---------	---------	---------	-------------------------------------	---------------------	---------------------------------	---------------------	-----------------------------

Surface Color: White ■ Black



10W ±10%	LED Current DC250mA	20W ±10%	LED Current DC500mA	30W ±10%	LED Current DC700mA
10°	15°	30°	15°	24°	36°
36°			45°		45°

RCG-1021R-02





>3 SDCM	CRI >80	CRI >90	Non-Dimmable	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	Dimmable 5%-100%	AC 100-120V 50/60Hz	AC 200-240V 50/60Hz	CCT 2700K/3000K/4000K/5000K

Surface Color: White Black

RCG-1022R-02





CREE **bridgelux**

6W ±10%	LED Current DC 500mA	9W ±10%	LED Current DC 200mA
15° 24° 38°		15° 24° 38°	
55°		55°	

RCG-1023R-02





5W ±10%	LED Current DC 350mA	10W ±10%	LED Current DC 700mA
10°		10°	
12W ±10%	LED Current DC 300mA	15W ±10%	LED Current DC 350mA
15° 24° 38°		15° 24° 38°	
55°		55°	

RCG-1024R-01





CREE **LUMINUS** **bridgelux**

24W ±10%	LED Current DC 600mA	15W ±10%	LED Current DC 1050mA	18W ±10%	LED Current DC 1200mA
15° 24° 38°		10°		10°	
55°					

RCG-1025R-01





CREE **LUMINUS** **bridgelux**

28W ±10%	LED Current DC 700mA	33W ±10%	LED Current DC 800mA
15° 24° 38°		15° 24° 38°	
55°		55°	

Reflector color





Black Golden Bright silver

Accessories




Honeycomb-Ø55 Bear soft lens-Ø55

RCG-1070R-01

RCG-1071R-01

RCG-1071R-03

RCG-1072R-01

RCG-1073R-01

Accessories



Beam soft lens-040



>3 SDCM	CRI >80	CRI >90	Non-Dimmable	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	Dimmable 5%-100%	AC 100-120V 50/60Hz	AC 200-240V 50/60Hz	CCT 2700K / 3000K / 4000K / 5000K
---------	---------	---------	--------------	---------------------	---------------------	------------------	---------------------	---------------------	-----------------------------------

Surface Color: White Black




6W ±10%	LED Current DC 500mA	9W ±10%	LED Current DC 200mA
15°	24°	38°	15°
55°			55°









5W ±10%	LED Current DC 350mA	10W ±10%	LED Current DC 700mA
10°		10°	



12W ±10%	LED Current DC 300mA	15W ±10%	LED Current DC 350mA
15°	24°	38°	15°
55°			55°

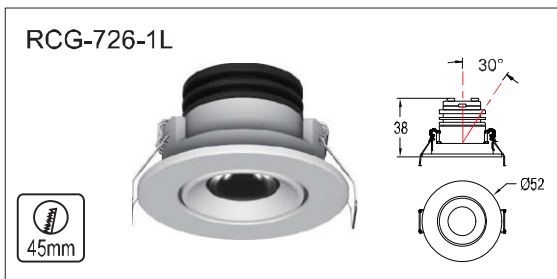

Surface Color: White Black



RCG-0502E

75mm

RCG-0502G

75mm

RCM-0505A03

38mm

RCM-0505A53

158x38mm

RCG-1071R-03


308x38mm

>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz	AC 200-240V 50/60Hz	35,000h	Max 40°C -20°C
			Non-Dimmable		Dimmable 5%-100%		CCT 2700K/3000K/4000K/5000K	

Surface Color: White Black

CREE **LUMINUS** **bridgelux**

9W ±10%	LED Current DC 200mA	13W ±10%	LED Current DC 300mA
---------	----------------------	----------	----------------------

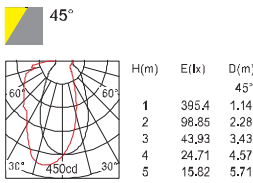


>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz	AC 200-240V 50/60Hz	AC 100-120V 50/60Hz	AC 200-240V 50/60Hz	35,000h	Max 40°C -20°C
			Not-Dimmable		Dimmable 5%-100%		CCT 2700K/3000K/4000K/5000K	

Surface Color: White Black


CREE **bridgelux**


3W ±10%	LED Current DC 500mA	15W ±10%	LED Current DC 200mA
10° 25° 50°		10° 25° 50°	
10x35°		10x35°	

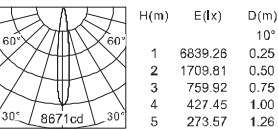

45W ±10%	LED Current DC 200mA
----------	----------------------

10° 25° 50°
10x36°

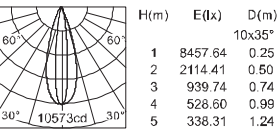

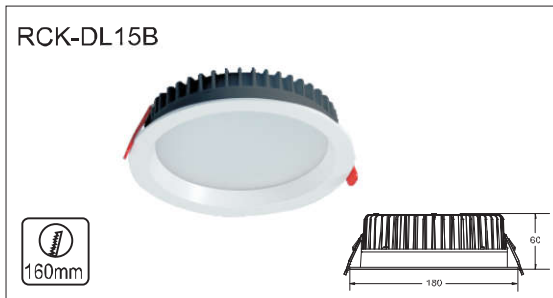

>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz AC 200-240V 50/60Hz Non-Dimmable	AC 100-120V 50/60Hz AC 200-240V 50/60Hz Dimmable 5%-100%	CCT 2700K/3000K/4000K/5000K
---------	---------	---------	--	--	-----------------------------

Surface Color: White Black



15W ±10%	LED Current DC 400mA	20W ±10%	LED Current DC 500mA
60° 90°		60° 90°	



>3 SDCM	CRI >80	CRI >90	AC 100-240V 50/60Hz AC 200-240V 50/60Hz Non-Dimmable	AC 100-120V 50/60Hz AC 200-240V 50/60Hz Dimmable 5%-100%	CCT 2700K/3000K/4000K/5000K
---------	---------	---------	--	--	-----------------------------

Surface Color: White Black





























23W ±10%	LED Current DC 600mA	30W ±10%	LED Current DC 700mA
60° 90°		60° 90°	

Optional COB Module / Housing kit list

 <p>PAR16 GU10 5.5W / 7W</p> <p>CCT : 2700K/3000K/4000K Angel : 12 / 24 / 36 CRI : 80</p>	 <p>LB222 (6W/9W/12W)</p>  <p>CCT : 2700K/3000K/4000K/5700K Angel : 15 / 24 / 38 / 55D CRI : 90</p>
---	--



<p>RCTL-SCY083 Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-Z089Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  
<p>RCTL-SCY093Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-FS085 Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  
<p>RCTL-SCF090Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-Y092</p> <p>Finishing Options : WH/BK</p>  
<p>RCTL-GN1Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-B095 Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  
<p>RCTL-GN2Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-X85 Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>   
<p>RCTL-GN3Q Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>  	<p>RCTL-X85T Easy Relamping Features</p> <p>Finishing Options : WH/BK</p>   

List of LED lamp photometric data and illumination figure



**6W/9W
12W/15W
COB LED**

